

# SLR01

## LED STREET LIGHT SERIES

Ensures Optimal Performance



# REDEANLED™

ILLUMINATE WITH EFFICIENCY AND DIRECTION

40W/ 60W/ 90W & 100W

Offering **Lumen Output of 5,200 Lm to 14,000 Lm**



**SLR01 LED Street Light Series**, which has three-size modulars with wattages 40W, 60W, 90W & 100W. Adopt a high-power LED patch (Lumileds/Osram) light source, the driver can match any brand. SLR01 has designed three photometric diagrams, including T2, T3, and T4, which are suitable for most two-lane, three-lane, and four-lane urban roads, highways, and country lanes. SLR01's heat dissipation design with a smooth surface eliminates the risk of accumulation of dust and dirt in harsh environments. Die-cast aluminum heat dissipation radiator, lightweight and faster heat dissipation, ensures the optimal performance of heat management.



## SLR01 LED STREET LIGHT SERIES

### Features:

- Light efficiency 130Lm/W. and 140lm/W optional
- **Lumen output from 5,600 Lm to 14,000 Lm**
- Have a patent of appearance and utility model
- Beam angle: Type II, Type III, Type IV, Type V
- IP66 water-proof & 10KV surge protection
- Operating Temperature: -30°C to +45°C
- Life Span L70B50 50,000h@35°C
- Certificates CE, RoHS available
- **5 years warranty**


**Light efficiency 130 Lm/W  
and 140 Lm/W optional**

Adopt high-power LED patch  
(Lumileds/Osram) light source,  
power supply can match any brand.





**Light efficiency 130 Lm/W  
and 140 Lm/W optional**

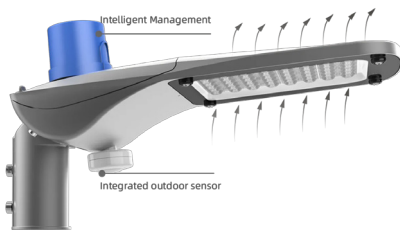


### Best Choice of Energy Saving

With a photocell and integrated outdoor sensor, SLR01 led street light become achieves the best energy-saving solution.



### Excellent Self-cleaning Ability

Streamlined design with a smooth surface eliminates the risk of accumulation of dust and dirt in harsh environments.

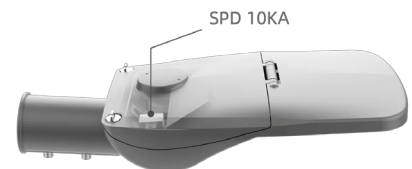

### Built-in 10KV Surge Protector

Protection against indirect and direct lightning or other transient overvoltage surges.

## Specifications:

Model	Wattage	CCT	Lumen Output	Dimming	CRI	Certifications
SLR01	40W 60W 90W 100W	3000K(130Lm/W) 4000K(140Lm/W)	~5,600 Lm ~8,400 Lm ~12,600 Lm ~14,000 Lm	Photocell Motion Sensor	Ra70	CE/RoHS





ILLUMINATE WITH EFFICIENCY AND DIRECTION

## SLR01 LED STREET LIGHT SERIES



ILLUMINATE WITH EFFICIENCY AND DIRECTION

M: +971 56 243 8755 E: [info@redeanled.com](mailto:info@redeanled.com)  
W: [www.redeanled.com](http://www.redeanled.com)